



## easy-linearfix / easy-linearfix-BIG

The perfect solution for absorbing reaction moments

- Suitable for screwing, drilling, thread cutting
- Quick and safe positioning
- Quick tool change
- Flexible
- Order and safety in the workplace

- Easy running thanks to recirculating ball bearings
- Can be turned by 360°
- Absorption of the screwdriver weight
- Easy handling
- No backing forces
- Exhaustion-free work



easy-linearfix-Twin  
for 2 screwdrivers




easy-linearfix-B  
with stops



easy-linearfix-Tele  
pull-out relief arm

## Adapters for screwdrivers

Order no.	Radius	Description
HST-EPF-H45	35 - 45 mm	Basic equipment
HST-EPF-H45-2	35 - 45 mm	Tool holder, pivots up to 45° to one side
HST-EPF-H45-90	35 - 45 mm	Equipped with 90° joint
HST-EPF-H60	45 - 60 mm	Alternative to EPF-H45
HST-EPF-FLEX	36 mm	Pivoting (for HST-3-xx-ST, HST-4-xx-ST, HST-A-6500)
HST-EPF-H065	45 - 60 mm	Top bracket (for HST-A-6500)
HST-EPF-H-BL7000	-	Tool holder for BL7000

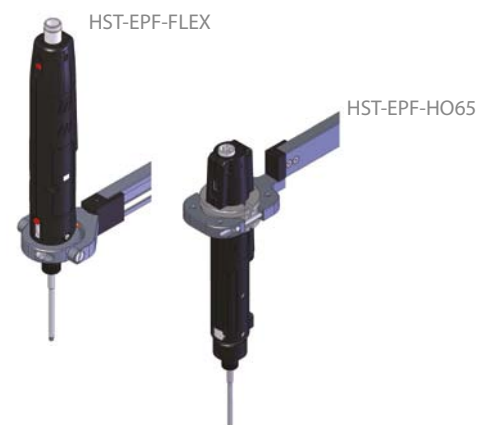

## easy-linearfix /easy-linearfix-BIG



### Technical Data

Order-no.	Working radius (pull-out length) in mm	Screwdriver weight in kg	Working height in mm	Torque absorbtion in Nm	Inclusive tool holder
EASY-LINEARFIX	130 - 460	0.5 - 2.5	60 - 430	max. 15	HST-EPF-H45
EASY-LINEARFIX-600	130 - 600	0.5 - 2.5	60 - 430	max. 15	HST-EPF-H45
EASY-LINEARFIX-700	130 - 700	0.5 - 2.5	60 - 430	max. 15	HST-EPF-H45
EASY-LINEARFIX-750	130 - 750	0.5 - 2.5	60 - 430	max. 15	HST-EPF-H45
EASY-LINEARFIX-B	160 - 500	0.5 - 2.5	60 - 430	max. 25	HST-EPF-H45
EASY-LINEARFIX-B-800	160 - 800	0.5 - 2.5	60 - 430	max. 25	HST-EPF-H45
EASY-LINEARFIX-B-900	160 - 900	0.5 - 2.5	60 - 430	max. 25	HST-EPF-H45
EASY-LINEARFIX-B-1000	160 - 1.000	0.5 - 2.5	60 - 430	max. 25	HST-EPF-H45

### Special versions

Order-no.	Working radius (pull-out length) in mm	Screwdriver weight in kg	Working height in mm	Torque absorbtion in Nm	Inclusive tool holder
EASY-LINEARFIX-2D	170 - 470	0.5 - 3.0	60 - 385	max. 15	HST-EPF-H45
Working area restricted on horizontal and vertical movements					
EASY-LINEARFIX-2D-10	170 - 470	0.5 - 3.0	60 - 1,050	max. 15	HST-EPF-H45
Working area restricted on horizontal and vertical movement					
EASY-LINEARFIX-TELE	255 - 580	0.5 - 2.5	57 - 427	max. 15	HST-EPF-H45
3-axe torque reaction arm (telescopic)					
EASY-LINEARFIX-TWIN	140 - 400	0.5 - 2.5	50 - 430	max. 15	HST-EPF-H45
3-axe torque reaction arm for 2 screwdrivers					
EASY-LINEARFIX-H1100	130 - 450	0.5 - 2.5	60 - 1,100	max. 15	HST-EPF-H45
Special height					